



Passport 8000

8600 Routing Switch Modules

Passport 8600 Series Features and Benefits

- High Availability
- Operational Simplicity
- Low Cost of Ownership
- Open IP Environment

The Passport* 8600 Routing Switch modules deliver wire-speed switching and routing over copper and fiber media. The Passport 8600 Routing Switch modules support a high-performance


Layer 2 and Layer 3 switching architecture that delivers 128 Gbps of switching capacity for high-performance application support today, scaling to 256 Gbps in the future. Wire-speed switching and routing between any two ports on the switch is performed with latency less than 10 μ s, making the Passport 8600 the ideal platform for deploying eBusiness and Internet Telephony applications in an Open IP environment. All 8600 Routing Switch modules feature eXpress Classification (XC), embedded hardware-based filtering for security and traffic classification, for wire-speed Layer 2, Layer 3 and Layer 4 policy services.

In combination with the Passport 8100 series Edge Switch modules and the Passport 700 server switches, the Passport 8600 Routing Switch modules are ideal for Enterprise backbones and server farms. One software license per 8600 chassis is required.

Switch Management

The 8690SF module (see Figure 1) is optimized for high-performance switching of Layer 2 and Layer 3 traffic. The on-board CPU performs independent learning of unknown devices and topology updates so that the switch fabric is dedicated to switching critical application


Figure 1: Passport 8600 series Switch Fabric/CPU Module.

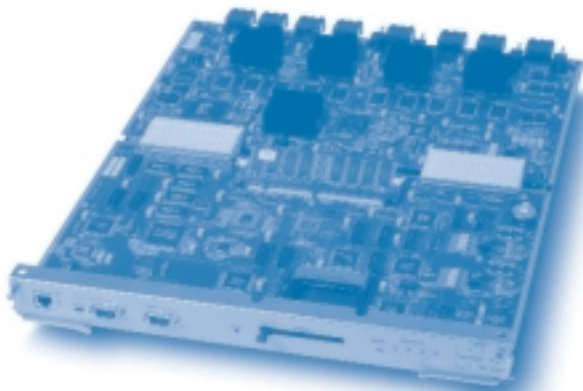

NORTEL
NETWORKS[™]

How the world shares ideas.

Figure 2: Passport 8600 series Fast Ethernet Routing Switch Modules.

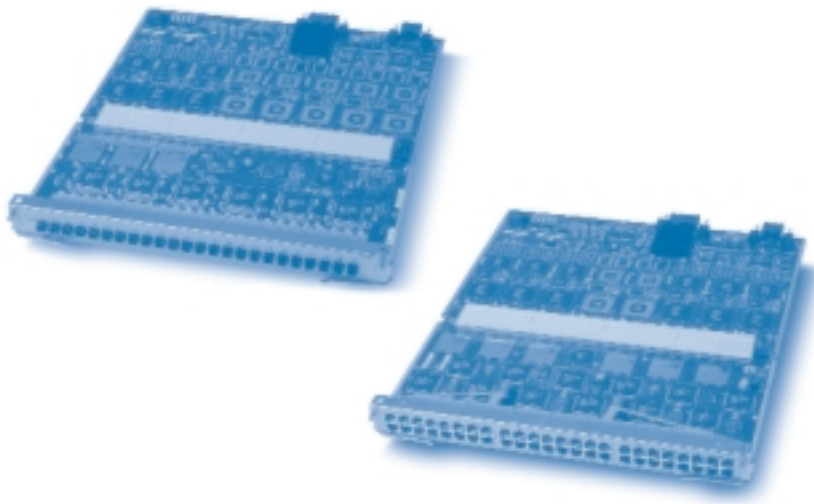

traffic. Two 8690SF modules can be installed for optimum performance and reliability. Both switch fabrics are used for traffic forwarding, doubling performance, and one CPU acts as the master software control engine. In the event of a SF/CPU failure, traffic is switched via the remaining SF/CPU module and control is passed to the secondary CPU automatically, in less than one second.

The SF/CPU module provides a console port (DTE/DCE switch selectable) and modem port using DB-9 pin connectors; a PCMCIA slot for ATA type cards and a 10/100 Ethernet port for management.

The SF/CPU module has LEDs to indicate temperature, power supply and fan tray status, CPU/SF master/secondary status, CPU and Switch Fabric utilization, and management port link and speed.

In addition to one or two SF/CPU modules, up to eight 8600 series Routing Switch modules can be installed in the Passport 8000 10-slot chassis and up to four modules in the 6-slot chassis.

Fast Ethernet

The two Fast Ethernet Routing Switch modules for the Passport 8600 are the 8648TX module and the 8624FX module (see Figure 2). These provide high availability, high port density and operational simplicity for LAN server farms and high-end policy-enabled wiring closets.

The 8648TX module provides 48 autosensing 10/100 Mbps ports for server and desktop connectivity using RJ-45 connectors. It is optimized for high-density server farms and high-end wiring closets, delivering cost-effective 10/100 switching and routing.

The 8624FX module provides 24 100 Mbps ports for riser and inter-switch connections using mini MT-RJ connectors. It is optimized for Fast Ethernet risers and long distance switch inter-connection over multi-mode fiber, delivering up to 1.6 Gbps of bandwidth in a single trunk using distributed Multi-Link Trunking. Both modules support eXpress Classification (XC) for wire-speed Layer 2, Layer 3 and Layer 4 policy services.

Each module has LEDs to indicate port status and activity, and additional LEDs to indicate module power and diagnostic status. The 8648TX module has LEDs to indicate port speed.

Gigabit Ethernet

The Passport 8600 series Gigabit Ethernet Routing Switch modules are IEEE 802.3z standards-compliant and deliver wire-speed switching and routing over both multi-mode and single-mode fiber media.

The 8608SX module provides eight 1000 Mbps ports for server and inter-switch connectivity using SC connectors. It is optimized for high-density server farms and building risers, delivering cost-effective wire-speed Gigabit switching and routing using multi-mode fiber.

Table 1: Maximum port densities for the Passport 8010 and 8006 chassis.

| Module and Interface Type | No. of Interfaces per module | Maximum No. of Interfaces per Chassis | |
|--|------------------------------|---------------------------------------|-------------------------------|
| | | Passport 8006 6-slot chassis | Passport 8010 10-slot chassis |
| 8648TX Routing Switch module 10/100 BASE-TX (RJ45) | 48 | 192 | 384 |
| 8624FX Routing Switch module 100 BASE-FX (Mini MT-RJ) | 24 | 96 | 192 |
| 8608SX Routing Switch module 1000 BASE-SX (SC) | 8 | 32 | 64 |
| 8608GBIC Routing Switch module 1000 BASE-SX/LX/XD GBICs (SC) | 8 | 32 | 64 |

The 8-port 8608GBIC Routing Switch module (see Figure 3) uses plug-in Gigabit Interface Converters (GBICs) with SC connectors for customers wishing to “mix and match” interface types on a single module. They are available in shortwave (SX), longwave (LX) and extended distance (XD and ZX). The 8608GBIC module is optimized for LAN backbones and server farms, enabling long-distance switch inter-connection over multi-mode or single-mode fiber.

Both modules deliver up to 16 Gbps of bandwidth in a single trunk using distributed Multi-Link Trunking and also support eXpress Classification (XC) for wire-speed Layer 2, Layer 3 and Layer 4 policy services.


Each module has LEDs to indicate port status and activity and additional LEDs to indicate power and diagnostic status.

Table 1 shows the connectivity types and maximum port density that can be supported in both the 6-slot and 10-slot chassis.

Future support for 16-port Gigabit Ethernet modules will enable density to scale to 128 ports in the 10-slot chassis and 64 ports in the 6-slot chassis.

Future releases will provide for Gigabit Ethernet over copper media, using IEEE 802.3ab compliant 1000BASE-T modules.

Figure 3: Passport 8600 series Gigabit Ethernet Routing Switch Modules (8608SX).

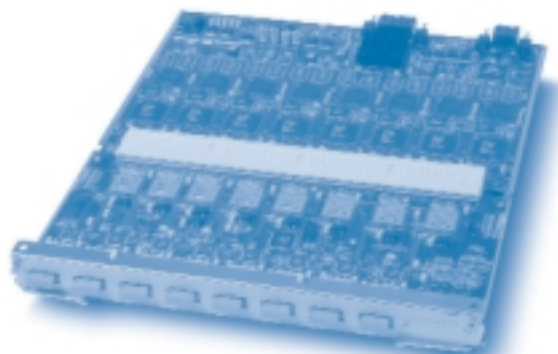

Features and Benefits

High Availability

- Redundant Switch Fabrics, with active load-balancing and automatic failover to eliminate any single point of failure.
- Hot-swap for all modules and chassis components.
- Enhanced Spanning Tree FastStart reduces convergence time on Layer 2 links.
- Distributed Multi-Link Trunking (MLT) delivers scalable, fail-safe riser, backbone and server connectivity with trunks distributed across multiple modules for improved resilience.
- Virtual Router Redundancy Protocol (VRRP) provides load-balancing and automatic recovery from default gateway failure.
- Equal Cost Multi-Path (ECMP) routing for OSPF backbones provides load-balancing and fast recovery from router or trunk failures in future software release.

Operational Simplicity

- Switch capacity of 128 Gbps, easily upgradeable to 256 Gbps in the future.
- Hardware support for up to 32,000 forwarding and filtering entries per switch.
- IEEE 802.3u 10/100 auto-negotiation for automatic speed and duplex setting.
- Non-blocking, wire-speed switching and routing for Ethernet, Fast Ethernet and Gigabit Ethernet.
- eXpress Classification (XC) — wire-speed filtering for security and policy services, based on Layer 2, 3 or 4 information.
- Multi-Link Trunking (MLT) increases riser, backbone and server scalability by aggregating 2 to 8 ports to form a single high-performance link of up to 16 Gbps capacity.
- Internet Group Management Protocol (IGMP) snooping and pruning, plus DVMRP multicast routing provides efficient control of Multicast traffic, with hardware scaling to 16,000 multicast groups
- Port, Protocol, MAC address and IP Subnet-based VLANs provides broadcast containment and separation of network traffic.
- 802.1Q VLAN tagging enables multiple VLANs be carried over a single riser trunk.
- Brouter support enables Layer 2 switching of legacy protocols like AppleTalk and DECnet while routing IP and IPX on the same port.

- 802.1p prioritization enables Class of Service (CoS) support for critical business applications.
- IP DiffServ support, with 8 hardware queues per port and Weighted Round Robin (WRR) queuing provides support for policy-based networking.
- Four groups of Remote Network Monitoring (RMON) per port.
- Conversation steering for local monitoring and troubleshooting or for use with Optivity* web-enabled StackProbes for full RMON2 management.
- Configuration using Command Line Interface (CLI) and Device Manager/VLAN Manager, common to all Passport products.

Low Cost of Ownership

- Future-proof chassis with built-in support for many different technologies.
- Web-based Optivity device and network management
- Support for Optivity end-to-end policy management
- Optimized solution for carrying Internet Telephony

Technical Specifications

Table 2: Technical specifications for the Passport 8690SF Switch Fabric/CPU module.

| System Electrical Specifications | |
|---|--|
| Line Frequency | 47 to 63 Hz |
| MTBF rating | 119,047 hrs |
| Module Microprocessor | PowerPC 740 |
| Module Memory | |
| Processor DRAM | 64MB |
| Flash Memory | 16MB |
| Module Electrical Specifications | |
| Input Power | 100W (max) |
| Thermal Rating | 340 BTU/hr |
| Module Physical Dimensions | 1.5 in. (H) x 15.4 in. (W) x 18.5 in. (D) [3.8 cm (H) x 39.1 cm (W) x 47.0 cm (D)] |
| Module Weight | |
| lb (kg) | 9 lbs (4 kgs) approx |
| Environmental Specifications | |
| Operating Temperature | 5° to 40° C |
| Storage Temperature | -25° to 70° C |
| Operating Humidity | 85% maximum relative humidity, non-condensing |
| Storage Humidity | 95% maximum relative humidity, non-condensing |
| Operating Altitude | 10,000 ft (3,000 m) maximum |
| Storage Altitude | 10,000 ft (3,000 m) maximum |
| Free Fall/Drop | ISO 4180-s, NSTA 1A |
| Vibration | IEC 68-2-6/34 |
| Shock/Bump | IEC 68-2-27-29 |

Table 2: Technical specifications for the Passport 8690SF Switch Fabric/CPU module (continued).

| Electromagnetic Emissions | |
|---------------------------------------|---|
| Meets requirements of | |
| US | FCC CFR47 Part 15, Subpart B, Class A |
| Canada | ICES-003, Issue-2, Class A |
| Australia/New Zealand | AS/NZS 3548:1995, Class A |
| Japan | VCCI-V3/97.04, Class A |
| Taiwan | CNS13438, Class A |
| | EN 55 022 (CISPR 22:1985), Class A |
| | CE Mark |
| Electromagnetic Susceptibility | EN 50082-1,1992 |
| Safety Agency Approvals | UL Listed (UL 1950) CUL CSA 22.2 #950 CB with all national deviations NOM NOM -019-SCFI 1994 |

Technical Specifications

Table 3: Technical specifications for the Passport 8648TX and 8624FX Fast Ethernet Routing Switch modules.

| System Electrical Specifications | |
|--|-------------|
| Line Frequency | 47 to 63 Hz |
| MTBF Ratings | |
| 8648TX | 107,411 hrs |
| 8624TX | 132,749 hrs |
| Module Performance Specifications (64 byte packets) | |
| Aggregate System Throughput | 96 Mpps |
| Switched 10 Mbps Port Forwarding Rate | 14,880 pps |
| Switched 100 Mbps Port Forwarding Rate | 148,810 pps |
| Latency for minimum packet length at 100 Mbps | 10µ Sec |

Table 3: Technical specifications for the Passport 8648TX and 8624FX Fast Ethernet Routing Switch modules (continued).

| | |
|---|---|
| Network Protocol and Standards Compatibility | IEEE 802.3 CSMA/CD (ISO/IEC 8802-3) IEEE 802.3i 10BASE-T (ISO/IEC 8802-3) IEEE 802.3u 100BASE-T (ISO/IEC 8802-3) IEEE 802.1D MAC Bridges (ISO/IEC 10038) |
| Data Rate and Encoding | 10 Mbps Manchester encoding 100 Mbps 4B/5B encoding |
| Module Memory | |
| Processor DRAM | 64MB |
| Flash Memory | 16MB |
| Module Electrical Specifications | |
| Input Power | 100W (max) |
| Thermal Rating | 340 BTU/hr |
| Module Physical Dimensions | 1.5 in. (H) x 15.4 in. (W) x 18.5 in. (D) [3.8 cm (H) x 39.1 cm (W) x 47.0 cm (D)] |
| Module Weight | |
| lb (kg) | 9 lbs (4 kgs) approx |
| Environmental Specifications | |
| Operating Temperature | 5° to 40° C |
| Storage Temperature | -25° to 70° C |
| Operating Humidity | 85% maximum relative humidity, non-condensing |
| Storage Humidity | 95% maximum relative humidity, non-condensing |
| Operating Altitude | 10,000 ft (3,000 m) maximum |
| Storage Altitude | 10,000 ft (3,000 m) maximum |
| Free Fall/Drop | ISO 4180-s, NISTA 1A |
| Vibration | IEC 68-2-6/34 |
| Shock/Bump | IEC 68-2-27-29 |

Table 3: Technical specifications for the Passport 8648TX and 8624FX Fast Ethernet Routing Switch modules (continued).

| | |
|---------------------------------------|---|
| Electromagnetic Emissions | |
| Meets requirements of | |
| US | FCC CFR47 Part 15, Subpart B, Class A |
| Canada | ICES-003, Issue-2, Class A |
| Australia/New Zealand | AS/NZS 3548:1995, Class A |
| Japan | VCCI-V3/97.04, Class A |
| Taiwan | CNS13438, Class A |
| | EN 55 022 (CISPR 22:1985), Class A |
| | CE Mark |
| Electromagnetic Susceptibility | EN 50082-1,1992 |
| Safety Agency Approvals | UL Listed (UL 1950) CUL CSA 22.2 #950 CB with all national deviations NOM NOM -019-SCFI 1994 |

Technical Specifications

Table 4: Technical specifications for the Passport 8608SX and 8608GBIC Gigabit Ethernet Routing Switch modules.

| | |
|--|---------------|
| System Electrical Specifications | |
| Line Frequency | 47 to 63 Hz |
| MTBF Rating | 96,609 hrs |
| Module Performance Specifications (64 byte packets) | |
| Aggregate System Throughput | 96 Mpps |
| Switched 1000 Mbps Port Forwarding Rate | 1,488,100 pps |
| Latency for minimum packet length at 100 Mbps | 10µ Sec |

Table 4: Technical specifications for the Passport 8608SX and 8608GBIC Gigabit Ethernet Routing Switch modules (continued).

| | |
|---|---|
| Network Protocol and Standards Compatibility | IEEE 802.3 CSMA/CD (ISO/IEC 8802-3) IEEE 802.1D MAC Bridges (ISO/IEC 10038) IEEE 802.3z 1000BASE-SX and 1000BASE-LX |
| Data Rate and Encoding | 1000 Mbps 8B/10B encoding |
| Gigabit Link Power Budget | |
| 1000BASE-SX | 7.5dB |
| 1000BASE-LX MultiMode Fiber | 7.5dB |
| 1000BASE-LX SingleMode Fiber | 8.0dB |
| Gigabit Cabling Distance Specification (minimum) | |
| 1000BASE-SX on MultiMode Fiber (50 μ m) | 550 m |
| 1000BASE-SX on MultiMode Fiber (62.5 μ m) | 275 m |
| 1000BASE-LX on MultiMode Fiber (50 μ m) | 550 m |
| 1000BASE-LX on MultiMode Fiber (62.5 μ m) | 550 m |
| 1000BASE-LX on SingleMode (10 μ m) | 5 km |
| 1000BASE-XD on SingleMode (10 μ m) | 50 km |
| Module Memory | |
| Processor DRAM | 64MB |
| Flash Memory | 16MB |
| Module Electrical Specifications | |
| Input Power | 100W (max) |
| Thermal Rating | 340 BTU/hr |
| Module Physical Dimensions | 1.5 in. (H) x 15.4 in. (W) x 18.5 in. (D) [3.8 cm (H) x 39.1 cm (W) x 47.0 cm (D)] |

Table 4: Technical specifications for the Passport 8608SX and 8608GBIC Gigabit Ethernet Routing Switch modules (continued).

| | |
|---------------------------------------|---|
| Module Weight | |
| lb (kg) | 9 lbs (4 kgs) approx |
| Environmental Specifications | |
| Operating Temperature | 5° to 40° C |
| Storage Temperature | -25° to 70° C |
| Operating Humidity | 85% maximum relative humidity, non-condensing |
| Storage Humidity | 95% maximum relative humidity, non-condensing |
| Operating Altitude | 10,000 ft (3,000 m) maximum |
| Storage Altitude | 10,000 ft (3,000 m) maximum |
| Free Fall/Drop | ISO 4180-s, NSTA 1A |
| Vibration | IEC 68-2-6/34 |
| Shock/Bump | IEC 68-2-27-29 |
| Electromagnetic Emissions | |
| Meets requirements of | |
| US | FCC CFR47 Part 15, Subpart B, Class A |
| Canada | ICES-003, Issue-2, Class A |
| Australia/New Zealand | AS/NZS 3548:1995, Class A |
| Japan | VCCI-V3/97.04, Class A |
| Taiwan | CNS13438, Class A |
| | EN 55 022 (CISPR 22:1985), Class A |
| | CE Mark |
| Electromagnetic Susceptibility | EN 50082-1,1992 |
| Safety Agency Approvals | UL Listed (UL 1950) CUL CSA 22.2 #950 CB with all national deviations NOM NOM -019-SCFI 1994 |

Ordering Information

Table 5: Ordering information for the Passport 8600 Routing Switch modules.

| Order Number | Product Name | Description |
|---------------|--------------------|--|
| DS1402001 | Passport 8010 | 10-Slot Chassis incl. 2 fan trays and backplane |
| DS1402002 | Passport 8006 | 6-Slot Chassis incl. 1 fan tray and backplane |
| DS1405?01** | Passport 8001 | Power Supply: 110/220 V AC |
| DS1405002 | Passport 8002 | Power Supply: 48 V DC |
| DS1404001 | Passport 8690SF | Routing Switch Switch Fabric/CPU module |
| DS1404002 | Passport 8648TX | 48-port 10/100 Ethernet Routing Switch module (RJ45) |
| DS1404005 | Passport 8624FX | 24-port 100BASE-FX Fast Ethernet Routing Switch module (MT-RJ) |
| DS1404003 | Passport 8608SX | 8-port 1000BASE-SX Gigabit Ethernet Routing Switch module (SC) |
| DS1404015 | Passport 8608 GBIC | 8-port Gigabit Ethernet Routing Switch module (requires one or more GBICs – see below) |
| AA1419001 | 1000BASE-SX GBIC | 1-port 1000BASE-SX GBIC (SC) for MultiMode fiber |
| AA1419002 | 1000BASE-LX GBIC | 1-port 1000BASE-LX GBIC (SC) for MultiMode and SingleMode fiber |
| AA1419003 | 1000BASE-XD GBIC | 1-port 1000BASE-XD GBIC (SC) for SingleMode fiber up to 50 km |
| AA1419004 | 1000BASE-ZX GBIC | 1-port 1000BASE-ZX GBIC (SC) for SingleMode fiber up to 70 km |
| DS1410003-3.0 | | Software for the Passport 8600 series Routing Switch modules |

** The seventh character (?) of the AC Power Supply order number MUST be replaced with the proper code to indicate desired product nationalization: "A" – No power cord included. "B" – European "Schuko" power cord common in Austria, Belgium, Finland, France, Germany, The Netherlands, Norway and Sweden. "C" – Power cord commonly used in the United Kingdom and Ireland. "D" – Power cord commonly used in Japan. "E" – North American power cord. "F" – Australian power cord, also commonly used in New Zealand and the People's Republic of China.

Acronym Glossary

| | | | | | |
|--------------|---|-------------|---|-------------|---|
| CLI | Command Line Interface | IEEE | Institute of Electrical and Electronic Engineers | VLAN | Virtual LAN |
| CoS | Class of Service | IGMP | Internet Group Management Protocol | VRRP | Virtual Router Redundancy Protocol |
| CPU | Central Processor Unit | LAN | Local Area Network | WRR | Weighted Round Robin queuing |
| DVMRP | Distance Vector Multicast Routing Protocol | LED | Light-Emitting Diode | XC | eXpress Classification |
| ECMP | Equal Cost Multi-Path routing | MAC | Media Access Control | | |
| GBIC | Gigabit Interface Converter | MLT | Multi-Link Trunking | | |
| | | RMON | Remote Network Monitoring | | |
| | | SF | Switch Fabric | | |
| | | STP | Spanning Tree Protocol | | |



NORTEL NETWORKS™

How the world shares ideas.

For more sales and product information, please call 1-800-822-9638.

United States

Nortel Networks
4401 Great America Parkway
Santa Clara, CA 95054
1-800-822-9638

Canada

Nortel Networks
8200 Dixie Road
Brampton, Ontario
L6T 5P6, Canada
1-800-466-7835

Europe, Middle East, and Africa

Nortel Networks
Les Cyclades - Immeuble Naxos
25 Allée Pierre Ziller
06560 Valbonne France
33-4-92-96-69-66

Asia Pacific

Nortel Networks
151 Lorong Chuan
#02-01 New Tech Park
Singapore 556741
65-287-2877

Caribbean and Latin America

Nortel Networks
1500 Concord Terrace
Sunrise, Florida
33323-2815 U.S.A.
954-851-8000

<http://www.nortelnetworks.com>

*Nortel Networks, the Nortel Network corporate logo, the Globemark, How the World Shares Ideas, BaySecure, Optivity and Passport are trademarks, of Nortel Networks. All other trademarks are the property of their owners. © 2000 Nortel Networks. All rights reserved. Information in this document is subject to change without notice. Nortel Networks assumes no responsibility for any errors that may appear in this document.

PB3622-B / 05-00